



SmartOne

Satellite Managed Asset Ready Tracker



Industry Applications

Trailers
Marine
Rail
Containers
Heavy Equipment
Security and Military

Rugged Construction

Operates in extreme temperature and conditions
Operational temperature range: -30°C to +60°C
Intrinsic Safety (UL Class 1, Division 1 Groups A, B, C, D) for US and Canada
FCC CFR Parts 15 and 25
Industry Canada
CE Mark (European Certification)
COFETEL

Global Operation

Works virtually everywhere in North America and has extensive global coverage (see coverage maps)

Ease of Operation

Designed intuitively, requires very little maintenance

Valuable Information

Location, door open/closed, and motion data

Three Reporting Modes

Based on "in-motion" or stationary status

Field Replaceable Battery Options

Operates for 3+ years on "off-the-shell" AA 1.5 V lithium batteries (2 messages per day)

Hardware ON/OFF feature

Easily rotate connector cover to power ON/OFF
Manually Re-Centers GPS functionality

Easy & Inexpensive to Install

Covert installation. Terminal will fit between the ribs of containers

Size

Dimensions: 6.25" x 3.25" x 1" (83 x 165 x 26 mm)

Mobile Resource Management Simplified



Containers



Rail



Marine



Trailers




Heavy Equipment



Oilfield Equipment

SMART ONE COVERAGE MAP

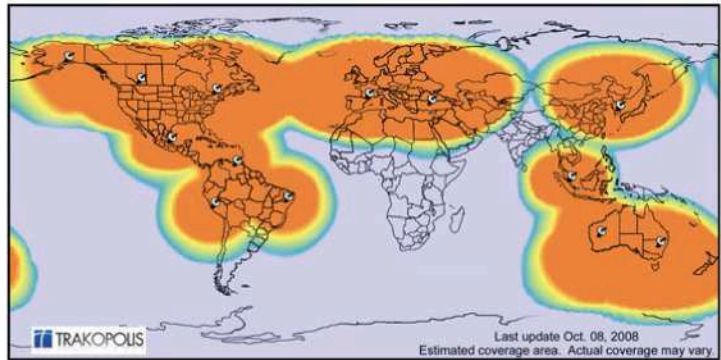


- Globalstar Gateway
- Primary Globalstar Service Area (100-98% completion rate*)
- Extended Globalstar Service Area (98-90% completion rate*)
- Fringe Globalstar Service Area (80-90% completion rate*)

*Completion rates based on Remote Telemetry Units (RTU) that are set to transmit a single packet message 3-times (the original transmission plus 2-repeats) in the frequency appropriate for the given regions. This is an estimate of coverage only. Actual Remote Telemetry coverage may vary based on terminal location, terrain features, signal strength and other factors affecting satellite communications. Coverage may vary. Specifications subject to change without notice.

The Smart One transfers data over the extensive Globalstar Networks. This terminal can report from anywhere on this network without additional roaming fees.



SMART ONE DATA FLOW

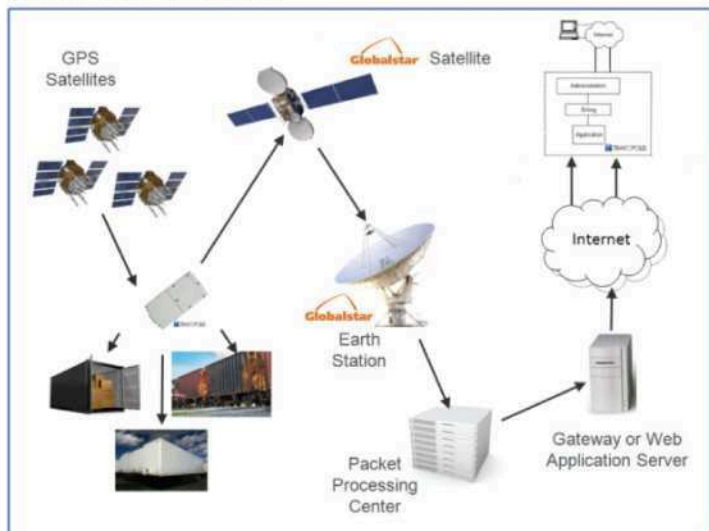

CAN Telematics Inc.

Main Office: 866.340.2705 (toll free)

E-mail: info@trakopolis.com

Web: <http://www.cantelematics.com>

<http://www.trakopolis.com>